

Installation Manual

Fixed flyscreen SP 5 / 10

For your safety



- Ensure that the area below the window is not entered during assembly.
- When working under raised parts or work equipment, they must be secured with suitable devices against dropping.
- The insect screen is not suitable as an anti-fall device.

General information



- No additions or modifications may be made to the product.
- Check that the parts are in good condition before assembly. No damaged parts may be installed.



Please read this assembly manual carefully, as we can not be held liable for faults caused by incorrect installation.
Only use stainless steel screws for mounting.

Parts

Angle bracket



13 24 60.xx
4 pieces

For tall or wide units (if supplied)



RK 2,9 x 9,5
15 03 29.09.TX
2 pieces



Angle bracket to
prevent bending
13 24 66.xx 2 pieces


Recommended tools

TX10




Screw driver

Horizontal section

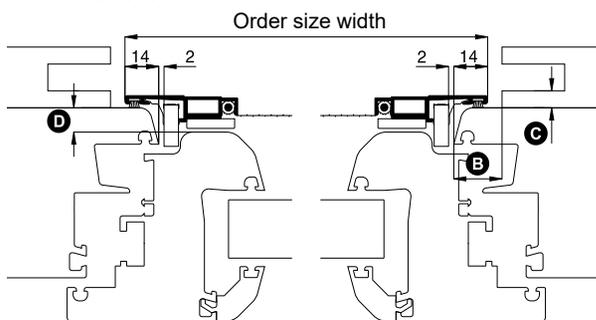

Vertical section

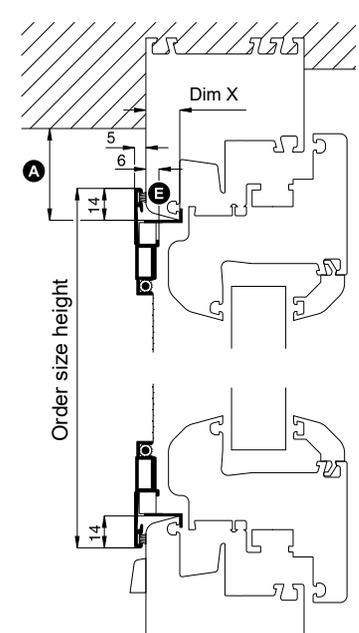

1 Installing the angle brackets

Slide the top and bottom bracket tabs into the slots until they click into place.

In order to prevent bending of the flyscreen frame, some units are supplied with specific angle brackets. Screw the angle brackets onto the angle bracket mountings with the supplied screws.

2 Mounting the frame

The flyscreen can be installed from both the inside and outside as required.

From the inside, hold the flyscreen by the flap handles. From the outside hold it by the frame.

Engage the top brackets and push the flyscreen upwards against the spring loaded brackets. Then bring in the bottom and engage the bottom brackets by lowering the flyscreen frame into place.

! Check if all angle brackets are fully engaged!

If angle brackets for bending prevention are supplied, proceed to install them into the appropriate pre-drilled holes on the inside of the flyscreen frame to prevent the flyscreen frame from bending.